

A Novel Omnidirectional Circularly Polarized Pagoda Antenna with Four Shorting Pins for UAV Applications

Zheyu Li, Yongzhong Zhu*, Yu Shen, Xiaoyu Liu, and Guohao Peng

School of Information Engineering
Engineering University of PAP, Xi'an, Shanxi, 710086, P. R. China
lzyewe@163.com, *bsbs1980@sina.com, 348511372@qq.com, lxywjgd@163.com, 302662481@qq.com

Abstract — A novel omnidirectional circularly polarized (CP) pagoda antenna with four shorting pins is presented. In this structure, four curved branches are utilized to generate horizontal polarization, while coaxial cable and four shorting pins produce vertical polarization. Omnidirectional CP radiation is achieved by combining the radiation from the branches and the shorting pins. The curved branches loaded with shorting pins reduce the size of the antenna and the antenna is loaded with the lower substrate with two coupling patches to improve the bandwidth. The novel pagoda antenna is fabricated and measured. Its final dimensions are $0.42\lambda_0 * 0.42\lambda_0 * 0.33\lambda_0$ (λ_0 is the free-space wavelength at operating frequency). The impedance bandwidth ($S_{11} \leq -10\text{dB}$) is 0.53GHz and the axial ratio (AR) bandwidth ($AR \leq 3\text{dB}$) is 0.95GHz, which can be used for unmanned aerial vehicles' diagram transmission in China.

Index Terms — Circularly Polarized (CP), coupling patch, curved branch, omnidirectional antenna, shorting pin.

I. INTRODUCTION

Omnidirectional circularly polarized (CP) antennas have attracted more and more attention from experts and scholars due to they widely used in wireless communication, remote sensing and telemetry and satellite communication systems. Omnidirectional antenna can radiate electromagnetic wave in any direction in a plane, which is suitable for multipoint simultaneous communication and communication in uncertain position during movement. The CP antennas can accept arbitrary polarized wave, reduce multipath interference, and have high polarization isolation. Having both advantages of omnidirectional antenna and CP antenna, omnidirectional CP antenna can meet the requirements of accurate signal transmission of unmanned aerial vehicle (UAV) systems and be used as its image transmission antenna, which can effectively reduce the signal blind area and polarization interference.

In recent years, many methods of realizing

omnidirectional CP antennas have been proposed, which can be roughly classified into three categories. The first method is circular polarized method of omnidirectional antenna that a circular polarizer is loaded outside the omnidirectional antenna. In [1], the omnidirectional CP antenna is realized by using the parallelepiped medium element with high dielectric constant to embrace around the coaxial probe. In [2], the inner conductor is fed, while the spiral groove is opened on the outer cylinder conductor. The second method is element combination [3-6], which uses the combination of CP antenna elements to achieve omnidirectivity. In [3], circular open rings loaded with parasitic rings are used as CP antenna elements, and they are combined around cylinder to attain omnidirectivity. In [4], a rectangular ring is used as a CP antenna element.

However, omnidirectional CP antennas realized by these two methods are generally large in size and have high profile, which is difficult to install on small and lightweight UAVs. In order to reduce the size and profile, a third method is proposed, which combines the antenna that generates the vertical polarized wave with the antenna that generates the horizontal polarized wave [7-15]. In [7], a broadband omnidirectional CP antenna was proposed, in which two sets of dipoles were used to generate omnidirectional CP waves. In [8], capacitive feeding is used to widen the bandwidth of the antenna. The antenna's profile is greatly reduced, but the radius is still large. In [9], planar sector-shaped endfire elements are used to realize omnidirectional circular polarization of the antenna, which further reduces the antenna profile. V-shaped slot on the same principle was used in omnidirectional CP antenna [10], which also makes the size of the antenna even smaller. The profile and radius of this kind of antenna are small, but the bandwidth is too narrow to meet the actual needs.

Based on the comparison with the antenna mentioned above, this paper proposes an omnidirectional CP antenna suitable for UAV image transmission system. The antenna's size is relatively small and has an adequate

bandwidth to ensure the transmission of information. Coaxial cable and four shorting pins are used to generate vertical polarized waves, while four curved branches are used to generate horizontal polarized waves. The structure of curved branches loaded with shorting pins are used to reduce the size of the antenna, and the dielectric substrates at the bottom with two ring patches are coupled to extend the bandwidth. Finally, the antenna's size is $0.42\lambda_0 * 0.42\lambda_0 * 0.33\lambda_0$. The impedance bandwidth of the antenna ($S_{11} \leq -10\text{dB}$) ranges from 5.56GHz to 6.09GHz, and the axial ratio (AR) bandwidth ($AR \leq 3\text{dB}$) is from 5.07GHz to 6.02GHz, effectively covering UAVs' diagram transmission frequency in China at 5.8GHz. The configuration, principles, simulation used by Ansoft high-frequency structure simulator (HFSS) and results of the antenna are described in detail in the following sections.

II. ANTENNA CONFIGURATION

Figure 1 shows the configuration of omnidirectional CP pagoda antenna. It consists of three dielectric substrates with a thickness of 1mm, a radiant patch, a reference ground, four shorting pins and four ring patches. The radiation patch and ground plane are located on the upper surface of the upper substrates and the middle substrates respectively, the material of which is FR-4 with the permittivity of 4.4 and the loss tangent of 0.002. The radiation patch and ground plane each contains four curved branches in opposite direction connected by shorting pins at the end, which are commonly used to reduce the size of antenna. The coaxial cable is in direct contact with the radiation patch for feeding. The inner conductor of coaxial cable and shorting pins are both made of copper.

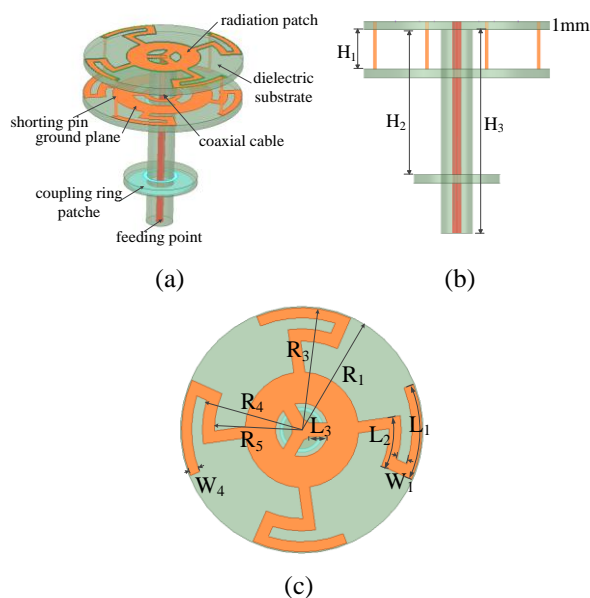


Fig. 1. Geometrical configuration of the proposed antenna. (a) Perspective view, (b) side view, (c) top view of the upper substrates, (d) top view of the middle substrates, and (e) top view of the lower substrates.

The curved branches loaded with shorting pin reduce the size of the antenna, but the bandwidth is relatively narrow. In order to improve the bandwidth for better practicability, the antenna is loaded with the lower substrate with two ring patches on the upper surface and the lower surface respectively. The lower substrate with two ring patches acts as a choking coil, similar to a metal sleeve. Because it can be coupled with the radiation patch to enhance the radiation intensity, the lower substrate broadens both impedance bandwidth and AR bandwidth. The parameters of the antenna are listed as follows: $R_1=11\text{mm}$, $R_2=5.1\text{mm}$, $R_3=10.9\text{mm}$, $R_4=9\text{mm}$, $R_5=8\text{mm}$, $R_6=6.9\text{mm}$, $R_7=2.7\text{mm}$, $R_8=4.5\text{mm}$, $W_1=1\text{mm}$, $W_2=2.75\text{mm}$, $W_3=0.82\text{mm}$, $W_4=0.9\text{mm}$, $L_1=8.74\text{mm}$, $L_2=5\text{mm}$, $L_3=3\text{mm}$, $H_1=4.65\text{mm}$, $H_2=17.09\text{mm}$, $H_3=24\text{mm}$.

III. PRINCIPLE AND METHODOLOGY

For omnidirectional CP pagoda antenna is understand clearly, working principle and parameters analysis of the proposed antenna are discussed in this section.

A. Omnidirectional CP property

CP waves are composed of two orthogonal linearly polarized waves with a phase difference of 90° . According to the duality principle, the electric field (\vec{E}) in the far field generated by the magnetic currents on the pagoda antenna can be expressed as:

$$\vec{E} = \hat{\theta} E_\theta + \hat{\phi} E_\phi. \quad (1)$$

It is found that when there are more branches,

omnidirectivity of the antenna is better, as shown in Fig. 2. And the operating frequency is reduced as the increase in the number of branches, which has the function of miniaturization, as shown in Fig. 3. However, considering the size of the antenna, four branches are finally chosen. The four branch elements are arranged in sequence and fed by coaxial cables, forming a clockwise current loop. The end of each branch element is connected to the ground plane by a shorting pin, that form a current path. According to the boundary condition, the clockwise current loop generates a vertical down magnetic pole ($\vec{J} = \vec{n} \times \vec{H}$), which forms a horizontal polarization component, the E_ϕ field. The radius of the current loop is R_1 . The far field of the current loop E_ϕ can be expressed as [16]:

$$E_\phi = \frac{[I]R_1\omega\mu_0}{2r} J_1(\beta R_1 \sin \theta) \hat{\phi}. \quad (2)$$

Where $[I]$ represents the magnitude of current on the loop, ω is the operating frequency, μ_0 is the free-space permeability, J_1 is Bessel's first order function, β is the propagation parameter of space and r is the distance between the antenna and the measuring point.

Vertical polarized waves are generated by coaxial cable and four shorting pins, which act as electrodes. What is more, the vertical polarized waves produced by the electrodes are omnidirectional. The height of the shorting pin can be seen as H_1 . Its far field E_θ can be expressed as [16]:

$$E_\theta = j \frac{[I]H\omega\mu_0}{4\pi r} \sin \theta \hat{\theta}. \quad (3)$$

Based on (2) and (3), it is noted that as long as the current $[I]$ through coaxial cable, curved branch and shorting pin is uniform, there will be a 90° phase difference between the vertical polarized component and the horizontal polarized component. The CP radiation pattern will be generated when the magnitude of E_θ and E_ϕ are adjusted to be equal. As shown in the Fig. 4, it can be found that the current passing through does not change its direction in one time. Therefore, two polarization components exist 90° phase difference to each other in the far field. Due to the compact structure of the antenna, two polarization components have the same amplitude and orthogonal to each other in space at the same time. Finally, the omnidirectional CP pagoda antenna is realized in theory.

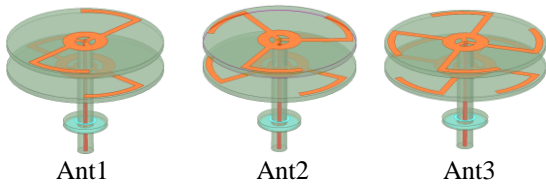


Fig. 2. Three improved prototypes of the proposed antenna.

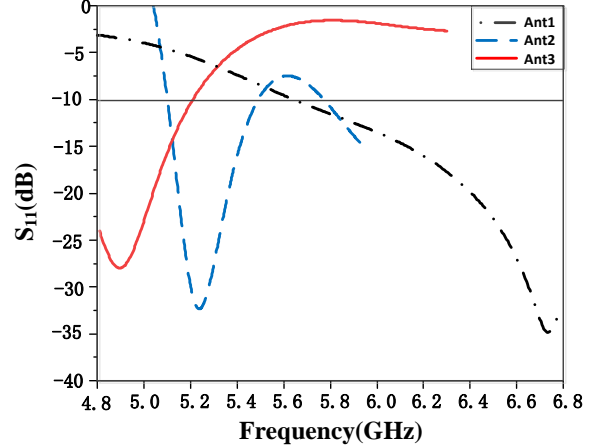


Fig. 3. Simulated $|S_{11}|$ of Ant 1, Ant 2 and Ant 3.




Fig. 4. Current distribution of the proposed antenna at 5.8GHz.

B. Parametric study and analysis

Curved branch can change the path of current, effectively reducing the size of the antenna. The length of the branches is approximately determined by:

$$\frac{R_6\pi}{4} + L_2 + \frac{W_4}{2} + R_5 = \lambda. \quad (4)$$

Where λ is the operating wavelength. As shown in Fig. 5, the radius of the curved branch is much smaller than that of the straight branch by adjusting the width of the branches when the current passes through the same length.

The shorting pin at the end of the branch not only supports the upper and middle dielectric substrates, but also miniaturizes the antenna. The two ends of the radiation patch are open, and there must be zero potential points in the standing wave. Loading shorting pin at zero potential points, the original state of standing wave will be made from open circuit to short circuit state, equivalent to make $\lambda/2$ to $\lambda/4$ harmonic resonance. The antenna size (R) can be approximately calculated by [17]:

$$R = \frac{\lambda}{4} = \frac{c}{4 \times \sqrt{\epsilon_{eq}} \times f}, \quad (5)$$

$$\epsilon_{eq} = \frac{H_1 + H_2}{\frac{H_1}{\epsilon_r} + \frac{H_2}{\epsilon_{air}}}. \quad (6)$$

Where c is the speed of light in vacuum, and ϵ_{eq} is the equivalent dielectric constant of multilayered substrate. Figure 6 compares the S parameters of antenna with shorting pin and without shorting pin. As can be seen from Fig. 6, the impedance characteristic of the antenna with shorting pin is obviously better than that without shorting pin, and the resonant frequency of antenna reduces, thus achieving the miniaturization. Therefore, the antenna size is reduced due to the curved branch loaded with shorting pin.

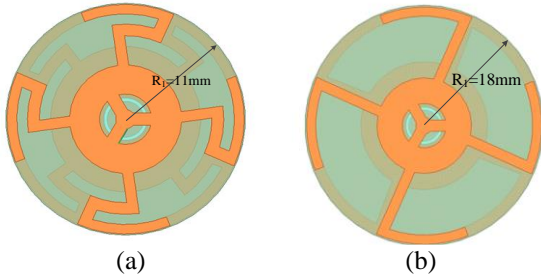


Fig. 5. Radius of (a) curved branch and (b) straight branch.



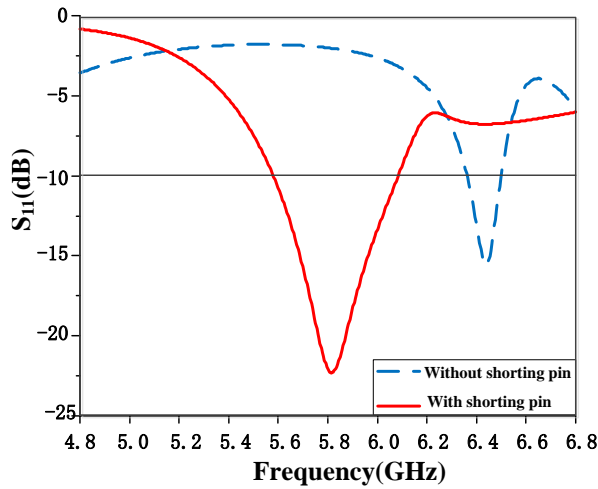


Fig. 6. Simulated $|S_{11}|$ of the proposed antenna with and without shorting pins.

The lower substrate with two coupling patches can adjust the resonance point and enlarge the bandwidth of the antenna. Figure 7 shows the comparison of S parameters and AR bandwidth of antennas with and without the coupling patches. It can be seen that the impedance bandwidth and AR bandwidth of the antenna both increase after the coupling patches loaded.

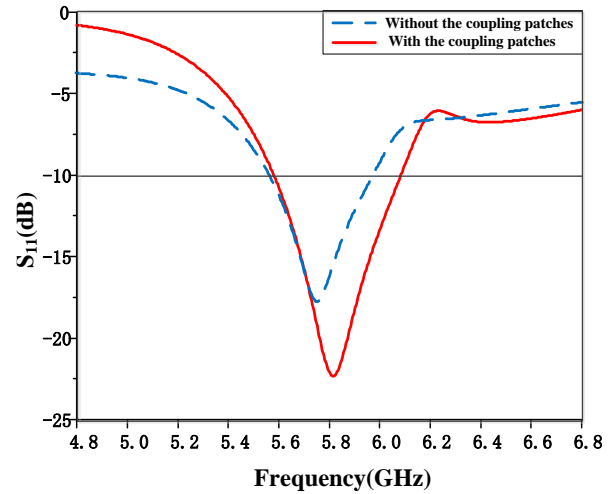

(a)

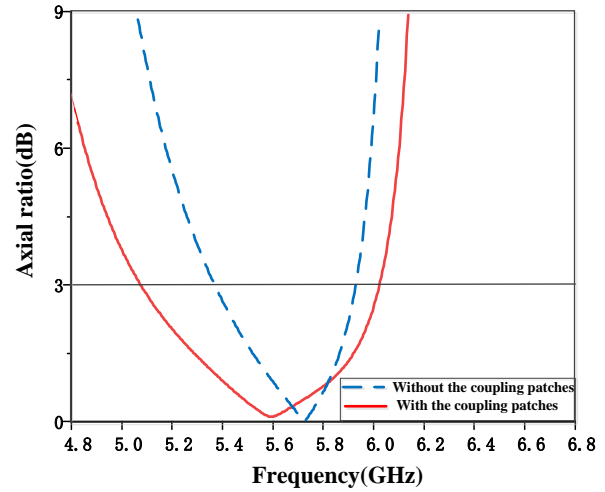

(b)

Fig. 7. Simulated (a) $|S_{11}|$ and (b) AR of the proposed antenna with and without coupling patches.

The coupling strength is affected by two factors [18], one is the distance between the upper substrate and the middle substrate H_1 , the other is curved branch arc width of the radiation patch W_4 . Figure 8 shows the influence of the distance H_1 on the operating frequency of the antenna. It can be seen from Fig. 8 (a) that when the distance H_1 decreases, the resonant frequency of the antenna increases, while Fig. 8 (b) shows that AR points shift towards higher frequency. Figure 9 shows the effect of the width W_4 . Figure 9 (a) shows that when W_4 decreases, the S -parameter curves of the antenna decrease while Fig. 9 (b) shows that the AR values have no obvious changes.

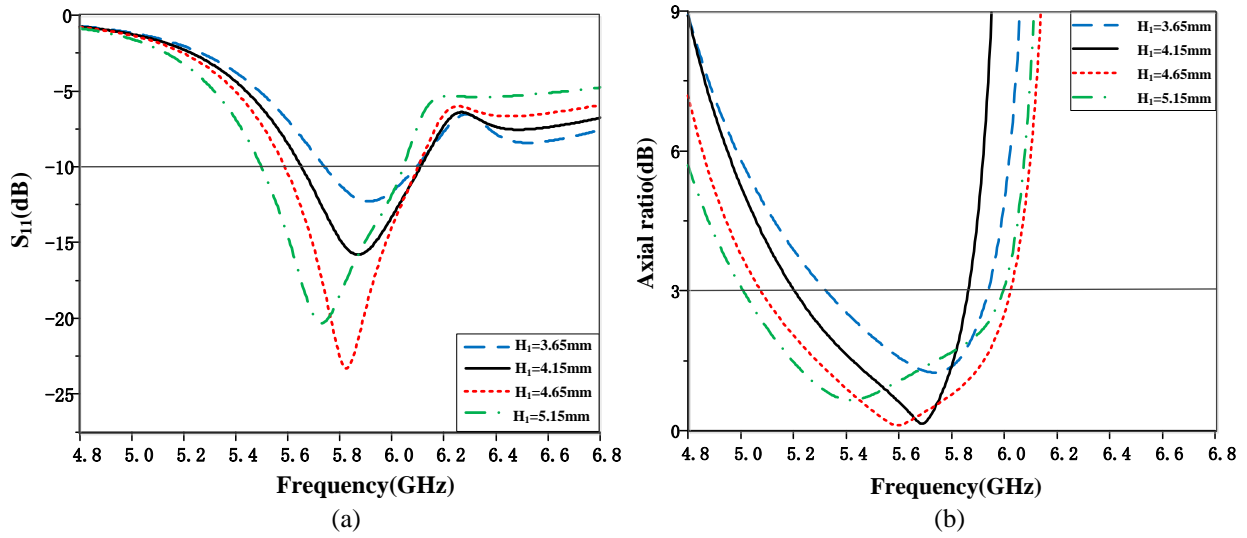


Fig. 8. Simulated (a) $|S_{11}|$ and (b) AR of the proposed antenna with different H_1 .

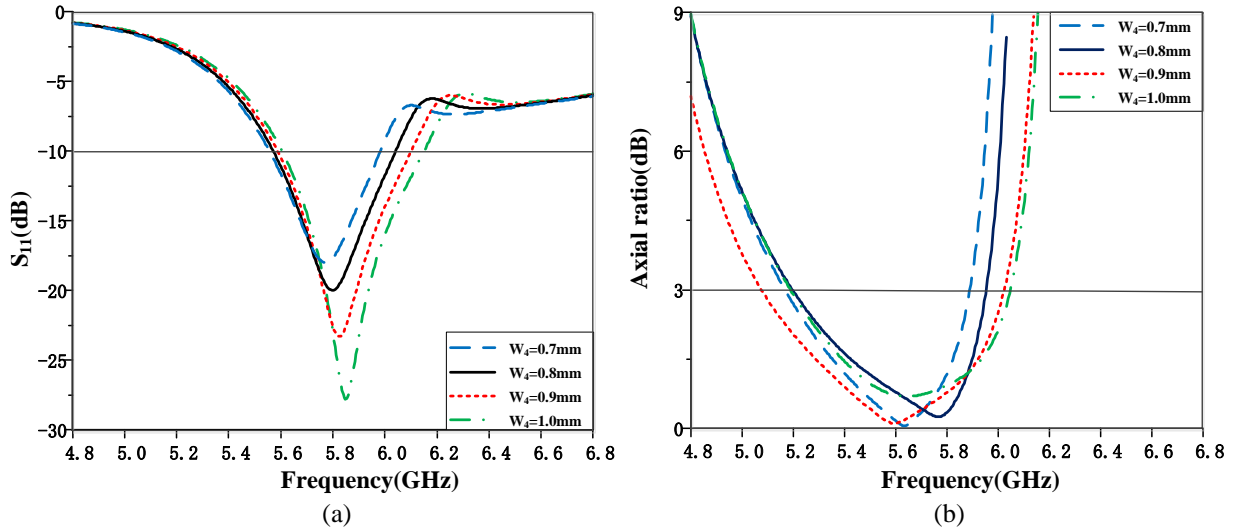


Fig. 9. Simulated (a) $|S_{11}|$ and (b) AR of the proposed antenna with different W_4 .

IV. EXPERIMENTAL RESULTS


In order to validate the proposed method, the antenna is fabricated, as shown in the Fig. 10. The antenna weighs only 4 grams, which makes it more suitable for UAVs diagram transmission because it's light enough. The measurements were implemented by an Agilent E8363B network analyzer and a far-field system in anechoic chamber.

Simulated and measured S parameters of antenna are shown in Fig. 11 (a). It can be seen that the measured


S parameters agree with the simulated values well. The measured bandwidth of the antenna ($S_{11} \leq -10\text{dB}$) is 0.64GHz, from 5.56GHz to 6.21GHz, equivalent to 11% at 5.8GHz. Figure 11 (b) shows simulated and measured AR bandwidth of antenna. The AR bandwidth ($AR \leq 3\text{dB}$) is 0.9GHz, from 5.10GHz to 6.00GHz, equivalent to 15.5%. It can be found that the overlapped bandwidth of Impedance and AR from 5.56GHz to 6.00GHz covers the UAVs diagram transmission frequency of 5.8GHz in China.



Fig. 10. Photograph of the fabricated antenna.

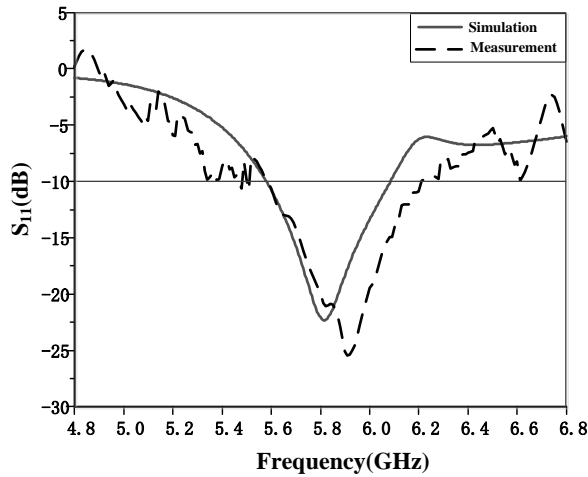

(a)

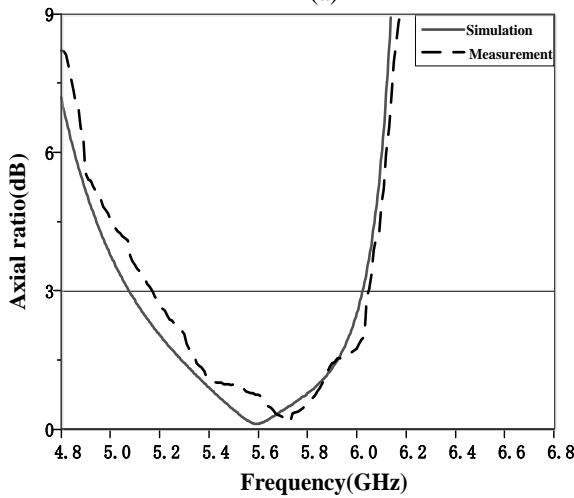

(b)

Fig. 11. Simulated and measured (a) $|S_{11}|$ and (b) AR of the fabricated prototype.

Figure 12 shows simulated and measured AR of the

antenna in the azimuth plane ($\theta = 90^\circ$) at 5.8GHz. It can be seen that there are some small differences between the simulated and measured values due to fabrication errors. From the figure, when it is simulated, the ARs fluctuate within 1dB. The measured ARs are slightly higher than the calculated results in all directions, but they are all less than 3dB in the plane, the ripple of which is 0.7dB. Both the simulated and measured values meet the requirement of circular polarization, which indicates that the antenna has good CP characteristics at 5.8GHz.

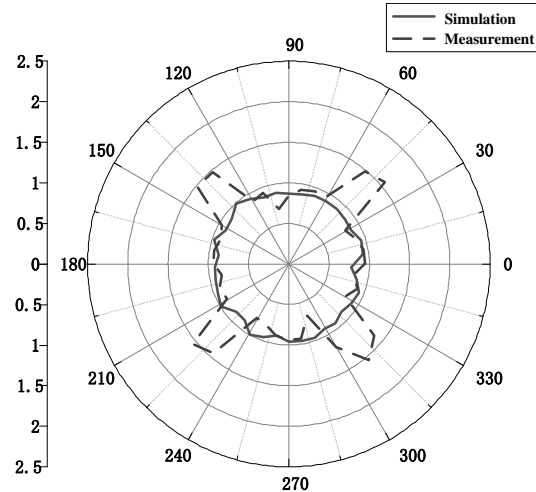


Fig. 12. Simulated and measured AR of the CP antenna in the azimuth plane ($\theta = 90^\circ$).

The simulated LHCP gain at 5.8 GHz is 1.12 dBic. Figure 13 shows the measured and calculated radiation patterns of the proposed antenna at 5.8 GHz in the azimuth (xy plane) and elevation (xz plane) planes, respectively. In xy plane, both the simulated and measured values of left-hand circularly polarized (LHCP) fluctuate around 1dB, while the simulated and measured values of right-hand circularly polarized (RHCP) are less than -15dB. In xz plane, it also can be seen that the results of the simulated and measured agree well with each other, and the level differences between the RHCP and LHCP are more than 15dB, that indicates the antenna is LHCP and has good omnidirectivity.

In order to show the advantage of the antenna, Table 1 compares the omnidirectional CP pagoda antenna with existing antennas in bandwidth and dimensions, from which the overall advantage of the novel pagoda antenna can be seen. Compared with the existing antenna, the overall size of novel pagoda antenna proposed is more advantageous. For the same size, the bandwidth is wider than that of the compared antenna.

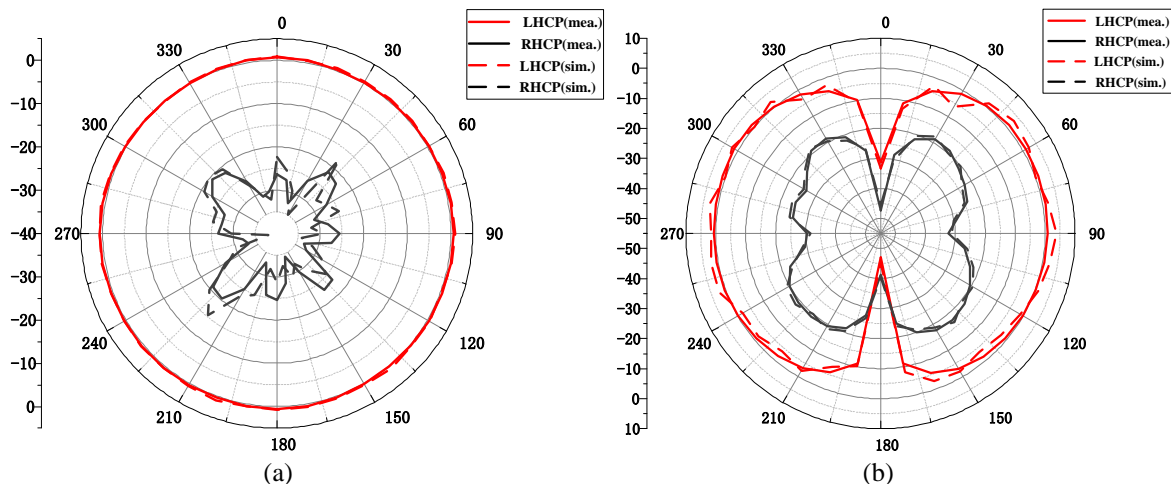


Fig. 13. Simulated and measured radiation patterns in (a) azimuth (xy plane) and (b) elevation (xz plane) planes at 5.8GHz.

Table 1: Performance comparison of reported omnidirectional CP antennas with existing antenna

Ref.	Dimensions (λ_0)	Imp. Bandwidth (%)	3dB AR Bandwidth (%)	Usable Bandwidth (%)
[7]	$1.63\lambda_0 \times 1.63\lambda_0 \times 0.28\lambda_0$	21.60	25.3	21.60
[9]	$0.62\lambda_0 \times 0.62\lambda_0 \times 0.029\lambda_0$	3.97	-	3.97
[10]	$0.52\lambda_0 \times 0.52\lambda_0 \times 0.026\lambda_0$	3.50	-	3.50
[15]	$0.24\lambda_0 \times 0.24\lambda_0 \times 0.12\lambda_0$	3.90	7.5	3.90
This work	$0.42\lambda_0 \times 0.42\lambda_0 \times 0.33\lambda_0$	9.00	16.4	9.00

V. CONCLUSION

A novel omnidirectional RHCP antenna is presented in this letter. The novel pagoda antenna loaded with the shorting pin and the lower substrate with two coupling patches achieves miniaturization in size with adequate bandwidth. The principle and experiment of the antenna are discussed in detail above. Finally, the impedance bandwidth of novel pagoda antenna is 0.53GHz, AR bandwidth is 0.95GHz and usable bandwidth is 0.53GHz, which can cover the UAVs diagram transmission frequency of 5.8GHz in China. With the final dimensions of $0.42\lambda_0 * 0.42\lambda_0 * 0.33\lambda_0$, the antenna has advantages compared with the existing antennas. At the same time, it can be found that the AR bandwidth of the antenna is wider than the impedance bandwidth, which provides a potential for the following research. Impedance bandwidth can be further broadened to achieve miniaturized broadband omnidirectional CP pagoda antenna.

ACKNOWLEDGMENT

This work was supported by the National Natural Science Foundation of China (No. 61771490), Shaanxi Natural Science Foundation Project (No. 2018JM6055),

the Basic Research Program of ENGG University of the Chinese People Armed Police Force (No. WJY201606) and Research team project (KYTD201803).

REFERENCES

- [1] Y. M. Pan and K. W. Leung, "Wideband circularly polarized dielectric bird-nest antenna with conical radiation pattern," *IEEE Trans. Antennas Propag.*, vol. 61, no. 2, pp. 563-570, 2013.
- [2] G. Zheng and B. Sun, "High-gain normal-mode omnidirectional circularly polarized antenna," *IEEE Antennas and Wireless Propagation Letters*, vol. 17, no. 6, pp. 1104-1108, June 2018.
- [3] Y. Fan, X. Y. Liu, and R. Li, "A broadband circularly polarized omnidirectional antenna with circular open-loops," *2016 IEEE International Conference on Computational Electromagnetics (ICCEM)*, Guangzhou, pp. 200-201, 2016.
- [4] X. Quan, R. Li, and M. M. Tentzeris, "A broadband omnidirectional circularly polarized antenna," *IEEE Transactions on Antennas and Propagation*, vol. 61, no. 5, pp. 2363-2370, May 2013.
- [5] Y. Fan, X. L. Quan, Y. Pan, Y. H. Cui, and R. L. Li, "Wideband omnidirectional circularly polarized

- antenna based on tilted dipoles,” *IEEE Trans. Antennas Propag.*, vol. 63, no. 12, pp. 5961-5966, Dec. 2015.
- [6] C. Y. Liu and Q. X. Chu, “Omnidirectional circularly polarized antenna based on crossed dipoles,” *2016 IEEE International Conference on Microwave and Millimeter Wave Technology (ICMMT)*, Beijing, pp. 731-733, 2016.
- [7] L. Yang, N. W. Liu, Z. Y. Zhang, et al., “A novel single feed omnidirectional circularly polarized antenna with wide AR bandwidth,” *Progress In Electromagnetics Research C*, vol. 51, pp. 35-43, 2014.
- [8] J. Su and F. Zhang, “Capacitive probe fed broadband circularly polarized omnidirectional Antenna,” *2018 Cross Strait Quad-Regional Radio Science and Wireless Technology Conference (CSQRWC)*, Xuzhou, pp. 1-1, 2018.
- [9] Q. X. Chu, Y. Mao, and X. R. Li, “A low-profile omnidirectional circularly polarized antenna using planar sector-shaped endfire elements,” *IEEE Transactions on Antennas & Propagation*:1-1.
- [10] C. Guo, R. Yang, and W. Zhang, “Compact omnidirectional circularly polarized antenna loaded with complementary V-shaped slits,” *IEEE Antennas and Wireless Propagation Letters*, vol. 17, no. 9, pp. 1593-1597, Sept. 2018.
- [11] Q. Nie, Z. Zhang, and G. Fu, “A compact omnidirectional circularly polarized antenna for 5G communication system,” *2018 International Conference on Microwave and Millimeter Wave Technology (ICMMT)*, Chengdu, pp. 1-2, 2018.
- [12] H. H. Tran, N. Nguyen-Trong, and H. C. Park, “A compact wideband omnidirectional circularly polarized antenna using TM_{01} mode with capacitive feeding,” *IEEE Antennas and Wireless Propagation Letters*, vol. 18, no. 1, pp. 19-23, Jan. 2019.
- [13] Y. Cai, S. Gao, Y. Yin, W. Li, and Q. Luo, “Compact-size low-profile wideband circularly polarized omnidirectional patch antenna with reconfigurable polarizations,” *IEEE Transactions on Antennas and Propagation*, vol. 64, no. 5, pp. 2016-2021, May 2016.
- [14] J. Li, Y. Huang, and G. Wen, “Design of a compact tri-band omnidirectional circularly polarized antenna,” *2018 IEEE International Symposium on Antennas and Propagation & USNC/URSI National Radio Science Meeting*, Boston, MA, pp. 121-122, 2018.
- [15] C. Y. Liu and Q. X. Chu, “A compact omnidirectional circularly polarized antenna,” *European Conference on Antennas and Propagation (Eu CAP 2018)*, *IET*, 1-2, 2018.
- [16] D. Wu, X. Chen, L. Yang, et al., “Compact and low-profile omnidirectional circularly polarized antenna with four coupling arcs for UAV applications,” *IEEE Antennas and Wireless Propagation Letters*, pp. (99):1-1, 2017.
- [17] J. Liu, Q. Xue, H. Wong, H. W. Lai, and Y. Long, “Design and analysis of a low-profile and broadband microstrip monopolar patch antenna,” *IEEE Transactions on Antennas and Propagation*, vol. 61, no. 1, pp. 11-18, Jan. 2013.
- [18] Y. Z. Zhu, D. Su, W. Xie, et al., “Design of a novel miniaturized Vivaldi antenna with loading resistance for ultra wideband (UWB) applications,” *Applied Computational Electromagnetics Society Journal*, vol. 32, no. 10, 2017.




Zheyu Li was born in Hubei, China. She received the B.S. degree in Communication Engineering from Engineering University of People’s Armed Police in 2018, and she is now studying for a master’s degree at Engineering University of People’s Armed Police. Her research interests are mainly in microwave antennas.



Yongzhong Zhu was born in Anhui, China. He received the B.S. degree in Communication Engineering from Engineering University of People’s Armed Police, the M.S. degree in Military Communication from Engineering University of People’s Armed Police, and the Ph.D. degree in Electronic Science and Technology from Xidian University, in 2002, 2005 and 2008, respectively. From 2009 to 2011, he was a Postdoctoral Fellow with Northwestern Polytechnical University. Since 2012, he has been an Associate Professor of microwave engineering with Engineering University of People’s Armed Police. His research interests are in microwave antennas and devices, wireless communications and information systems.



Shen Yu was born in Shanxi, China. She received the Bachelor degree in Military Communication from Engineering University of People’s Armed Police in 2006 and the M.S. degree in Military Communication from Engineering University of People’s Armed Police in 2009. Since 2019, she has been an Associate Professor of Command Information System of Engineering University of People’s Armed Police. Her research interests are in command information system.



Xiaoyu Liu was born in Inner Mongolia, China. He received the B.S. degree in Communication Engineering from Engineering University of People's Armed Police in 2018, and he is now studying for a master's degree at Engineering University of People's Armed Police. His research interests are mainly in microwave antennas.



Guohao Peng was born in Sichuan, China. He received the B.S. degree in Electronic and Information Engineering from Wuhan University of Science and Technology in 2018, and he is now studying for a master's degree at Engineering University of People's Armed Police. His research interests are mainly in microwave antennas.