

Microstrip Patch Antenna Covered With Left Handed Metamaterial

E. Dogan¹, E. Unal¹, D. Kapusuz¹, M. Karaaslan¹, and C. Sabah²

¹Department of Electrical and Electronics Engineering
University of Mustafa Kemal, 31200, Iskenderun, Hatay, Turkey
esradogan0688@gmail.com, eunal@mku.edu.tr, dilekkapusuz@gmail.com, mkaraaslan@mku.edu.tr

²Department of Electrical and Electronics Engineering, Middle East Technical University - Northern
Cyprus Campus, Kalkanli, Guzelyurt, TRNC / Mersin 10, Turkey
sabah@metu.edu.tr

Abstract — We present gain characteristics of microstrip patch antennas covered with metamaterial substrate composed of split-ring resonators (SRRs) and metallic strip. To determine the performance of the SRR-metallic strip mounted on microstrip patch antenna, the metamaterial has been proposed as an effective medium with extracted constitutive parameters. Simulation results are supported by experimental measurements. The experimental results confirm that the metamaterial covered patch antenna improves gain by an amount of -5.68 dB (% 60.3) as well as radiation pattern (-8 dB to +20 dB) at WLAN communication.

Index Terms - Effective parameters, FDTD, gain, patch antenna, metamaterial, and split ring resonator.

I. INTRODUCTION

Microstrip patch antenna is one of the most commonly used antenna in portable communication devices due to compact, conformal, low cost, and ease of fabrication properties. Although it offers many advantages as mentioned, it has some disadvantages, which result from conductor and dielectric losses. Beside this, gain reduction and poor directionality are also observed in this antenna due to surface waves [1]. Conductor and dielectric losses can be minimized by using perfect conductor and low loss dielectric substrate, but these choices result in higher fabrication cost. Gain, bandwidth enhancement, miniaturization, and broadband directionality can

be provided by using metamaterial structures [2-6].

Metamaterials are man-made structures designed to have properties that may not be found in nature. These structures may have both negative effective permittivity and permeability at the same frequency range. It provides negative effective refractive index over a certain frequency region(s) [7]. These properties of metamaterial provide novel application opportunities to several disciplines, such as microwave and optical cloaking, focusing of images, and sensing of biological and chemical substances.

Metamaterials have also many application areas for novel antenna systems [8-11]. One of the important applications of metamaterials is miniaturization of the microstrip antennas with different types of artificial materials. The conventional way of reducing the antenna size is to use high permittivity substrate. This approach reduces the wavelength of the signal in the substrate [12]. But, this design results in more energy consumption due to high permittivity, since it decreases the impedance bandwidth of the antenna. Another way is removing the substrate to minimize the effective dielectric constant. This application restricts the wave to travel in the substrate, hence, improving the gain of the patch antenna has been possible [13, 14]. However, the maximum gain enhancement does not exceed to 2 dB with all these techniques and the directionality also does not change too much. Hence, many different solutions have been proposed to overcome these problems, such as utilization of metamaterials with patch antenna [15-18].

This article describes a novel way to enhance both the gain and directionality of patch antenna used for WLAN applications. Split-ring resonators (SRRs) responsible for negative permeability and metal strip responsible for negative permittivity are used to improve both gain and directionality of patch antenna. The effective permittivity of the strip and the permeability of SRRs were evaluated by using both finite element method (FEM) based high frequency structure simulator (HFSS) and finite difference time domain method (FDTD) based computer simulation technique (CST). The dimensions of the inclusions (SRRs and strip) were optimized to realize negative values for the constitutive parameters at the operating frequency of the antenna. SRRs and metal strips were fabricated with optimum dimensions to provide negative constitutive parameters at 2.4 GHz. The fabricated metamaterial was mounted on microstrip patch antenna to observe the effects on it. The measurement results are in good agreement with simulation data. It has been noticed that the metamaterial considerably enhances the gain of the patch antenna.

II. METAMATERIAL DESIGN AND CONSTITUTIVE PARAMETERS

Figure 1 illustrates the front and the back side of metamaterial structure, which consists of both circular SRR and metallic strip (MS). The combined structure was designed on two sides of 10 mm × 10 mm × 1.6 mm FR4-epoxy ($\epsilon_r = 4.4$, $\mu_r = 1$, and dielectric loss tangent $\tan\delta = 0.02$). While SRR produce a response like magnetic materials and exhibit negative permeability, MS acts as a strong dielectric structure and exhibits negative permittivity[19].



Fig. 1. Front and back view of metamaterial.

All the dimensions of the SRR and MS are optimized by HFSS to achieve negative permittivity and permeability at 2.4 GHz. The

TEM wave is applied to the metamaterial. E-field is applied parallel to the MS and H-field is applied normal to the plane of SRR. It means that the system has directional dependency. The periodicity of one unit cell with SRR-MS was obtained by assigning perfectly electric conductor-PEC (side normal to E-field) or perfectly magnetic conductor-PMC (side normal to H-field) to the sides of the unit cell. The constitutive parameters were evaluated from the scattering parameters (S_{11} and S_{21}) by using Nicolson Ross Weir (NRW) approximation [20, 21],

$$z = \frac{\sqrt{(1+S_{11})^2 - S_{21}^2}}{\sqrt{(1-S_{11})^2 - S_{21}^2}} \tag{1}$$

$$n = \frac{j}{k_0 d} \ln \left(\frac{S_{21}}{1-S_{11} \frac{z-1}{1+z}} \right) \tag{2}$$

$$\epsilon_{eff} = n/z ; \mu_{eff} = n.z \tag{3}$$

where z , d , and k_0 represent the impedance, thickness of the metamaterial, and free space wave number, correspondingly. The effective permittivity, permeability, and refractive index are denoted by ϵ_{eff} , μ_{eff} , and n , respectively. The simulations are realized up to 6 GHz. All of the electromagnetic constitutive parameters are negative at 2.4 GHz. Hence, this structure can be used as negative refractive index metamaterial with patch antenna operating at this frequency as shown in Fig. 2.

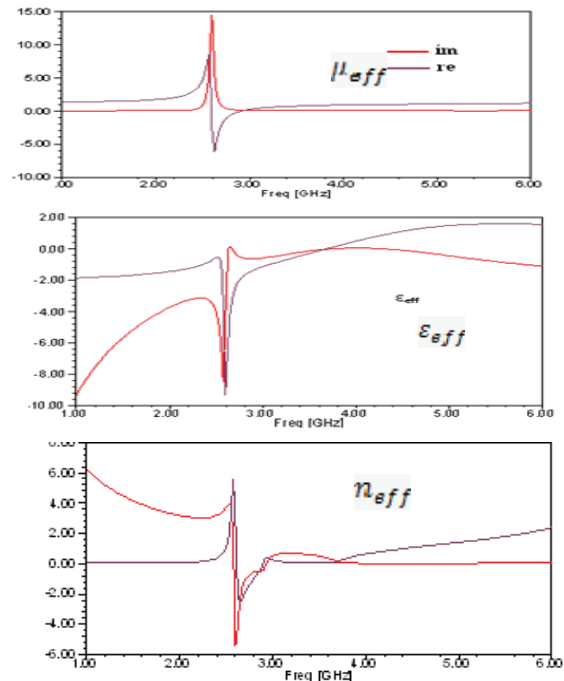



Fig. 2. Effective parameters of metamaterial.

Microstrip patch antenna was fabricated to operate at frequency range in which permittivity and permeability of metamaterial utilized with this antenna are negative. In this study, the frequency of 2.4 GHz is chosen for the operating frequency of microstrip patch antenna in which specifications are shown in Table 1.

Table 1: Dimensions of patch antenna on FR4 laminate.

Parameter	Magnitude	Unit
Operating frequency	2.4	GHz
Patch length(L)	59	mm
Patch Width(W)	42.4	mm
Laminate length (Lg)	75	mm
Feed	coaxial	-
Laminate Thickness	1.6	mm

The microstrip patch antenna was fabricated on an FR4 substrate ($\epsilon_r = 4.4$, $\mu_r = 1$, and dielectric loss tangent $\tan\delta = 0.02$). The evaluated results were obtained by HFSS and CST simulators and measured results of microstrip patch antenna without metamaterial are shown in Fig. 3. Return loss measurement was realized by using ENA Series Network Analyzer (E5071B). While return loss (gain value) $-S_{11}$ value of the patch antenna is -13.68 dB in HFSS and -16.64 dB in CST, measured value is only -9.42 dB. The difference between measured and simulated values of the antenna results from measurement errors and fabrication process.

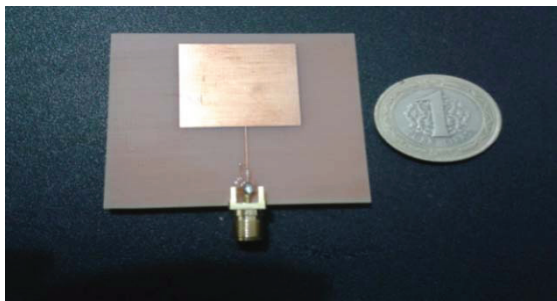

S11	HFSS	CST	Measurement
Patch Antenna	-13.68 dB	-16.64 dB	-9.42 dB

Fig. 3. Microstrip patch antenna without metamaterial and return losses in dB.

Effect of the metamaterial on the return loss of the microstrip patch antenna was investigated by placing metamaterial on it. The SRR-MS structure was fabricated to obtain negative constitutive parameters at 2.4 GHz and it was periodically mounted on microstrip antenna as shown in Fig. 4.

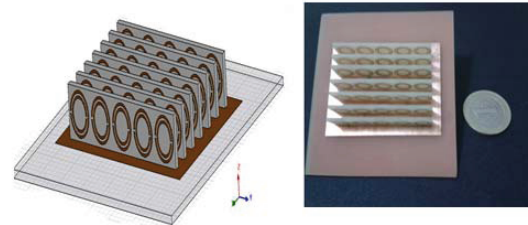


Fig. 4. Fabrication of patch antenna-metamaterial system.

The direction of the metamaterial is important to improve the gain of the patch antenna, since the metamaterial has anisotropic behavior. Therefore, they were mounted such that center of SRR is parallel to H-field and MT is parallel to E-field direction of the antenna. The distance between the periodically arranged metamaterials was 2 mm. The simulated and measured results of microstrip patch antenna covered with metamaterial are shown in Fig. 5. While the return loss decreases down to -20.27 dB in HFSS simulation and -23.33 dB in CST simulation, it was observed -15.1 dB in measurement at 2.4 GHz. This means 60.3 % enhancement of the antenna gain (return loss) with respect to antenna without metamaterial. The enhancement results of antenna with and without metamaterial is indicated in Table 2. Good gain improvement (return loss) is obtained for all of HFSS-CST and measurement results. Although, measured return loss (S_{11}) of the patch antenna with metamaterial indicates several modes at different frequencies as shown in Fig. 5 (c), but these modes are not sufficient to mention about new extra radiation frequencies. Since the return losses of these extra modes are higher than -10 dB.

Table 2: Comparison of simulation and measurement results of return loss (S_{11}).

	HFSS	CST	Measurement
without MTM	-13.6812 dB	-16.64 dB	-9.42 dB
with MTM	-20.2712 dB	-23.33 dB	-15.1 dB
Gain	-6.59 dB	-6.69 dB	-5.68 dB

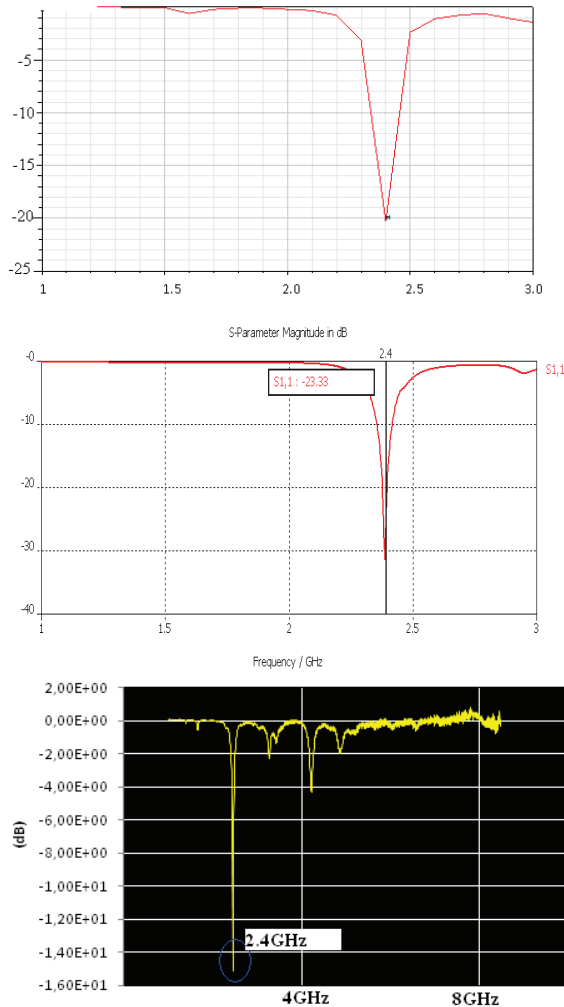


Fig. 5. (a) HFSS simulation, (b) CST simulation, and (c) measurement results of patch antenna with metamaterial.

It is well known that the radiation pattern of the antenna with and without metamaterial give exact idea about the gain of the antenna system, since the return loss (S_{11}) is not enough alone to decide the antenna performance. The radiation patterns of the patch antenna with and without metamaterial are evaluated by HFSS as shown in Figs. 6 and 7. The radiation patterns of H-plane are simulated at every 30° between $0^\circ/180^\circ$. Although the maximum radiation gain of the antenna without metamaterial is -8 dB (Fig. 7), it reaches up to +20 dB for antenna with metamaterial (Fig. 6). These exhibits that metamaterial doesn't only provide minimization of return loss (S_{11} value) but also gives a chance to enhancement of the antenna gain.

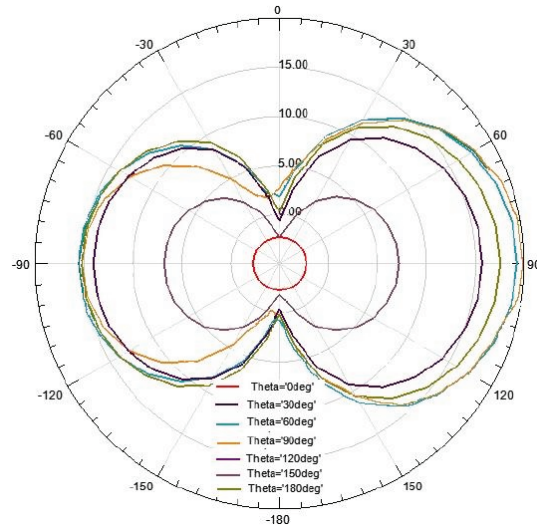


Fig. 6. HFSS simulation of radiation pattern of patch antenna with metamaterial.

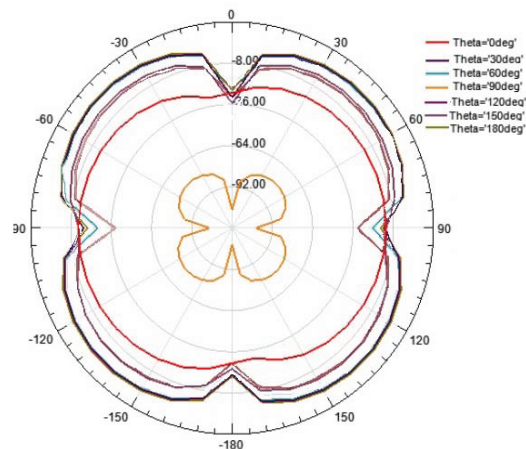


Fig. 7. HFSS simulation of radiation pattern of patch antenna without metamaterial.

Beside the simulations of radiation pattern, some measurements were also realized to observe the effect of metamaterial on patch antenna by using MATS1000. The HFSS simulation for patch antenna without metamaterial and measurement result for patch antenna with metamaterial are shown in Fig. 8. Two different antennas were used at the measurements. One of them is metamaterial mounted patch antenna and the other one is ring antenna to observe the radiation pattern of H-plane. Whereas simulation result of H-plane radiation gain is around -72 dB, measurement result is much better (-47.5 dB). These results indicate the enhancement of antenna radiation gain due to the metamaterial.

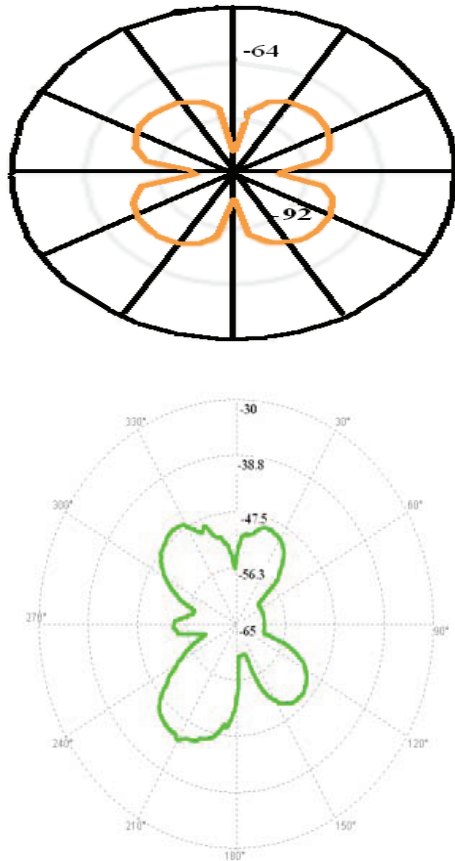


Fig. 8. Simulation and measurement radiation pattern results of patch antenna without and with metamaterial (H-plane).

III. CONCLUSIONS

In this study, simulation, fabrication, and measurement are investigated for microstrip patch antenna covered with metamaterial composed of SRR and MS. The results show that good improvement in the antenna characteristics in terms of gain is achieved. The gain of the microstrip patch antenna with metamaterial is increased by 6.69 dB from simulation and 5.68 dB from measurement. It can be concluded that microstrip patch antenna based on metamaterial exhibits improvement on the antenna gain performance. Therefore, metamaterials provide potential application areas to antenna researchers, such as improvement of the gain or radiation properties of any type of antenna.


REFERENCES

- [1] R. Waterhouse, *Microstrip Patch Antennas—A Designer's Guide*, Kluwer Academic Publishers, Boston, MA, 2003.
- [2] M. Palandoken, A. Grede, and H. Henke, "Broadband microstrip antenna with left-handed metamaterials," *IEEE Trans. Antennas Propag.*, vol. 57, pp. 331-338, 2009.
- [3] S. Burokur, M. Latrach, and S. Toutain, "Theoretical investigation of a circular patch antenna in the presence of left-handed metamaterial," *IEEE Antennas Wirel. Propag. Lett.* vol. 4, pp. 183-186, 2005.
- [4] T. Liu, X.-Y. Cao, J. Gao, Q. Yang, and W.-Q. Li, "Design of miniaturized broadband and high gain metamaterial patch antenna," *Microwave Opt. Technol. Lett.*, vol. 53, pp. 2858-2861, 2011.
- [5] M. Veysi and A. Jafargholi, "Directivity and bandwidth enhancement of proximity-coupled microstrip antenna using metamaterial cover," *Applied Computational Electromagnetics Society (ACES) Journal*, vol. 27, no. 3, pp. 261-270, March 2012.
- [6] A. Jafargholi and M. Kamyab, "Dipole antenna miniaturization using single-cell metamaterial," *Applied Computational Electromagnetics Society (ACES) Journal*, vol. 27, no. 3, pp. 261-270, March 2012.
- [7] R. Ziolkowski, "Double negative metamaterial design, experiment and applications," *IEEE Trans. Microwave Theory Tech.*, vol. 51, pp. 396-399, 2003.
- [8] J. Liu, W. Shao, and B. Wang, "A dual-band metamaterial design using double SRR structures," *Applied Computational Electromagnetics Society (ACES) Journal*, vol. 26, no. 6, pp. 459-463, June 2011.
- [9] M. Tang, S. Xiao, D. Wang, J. Xiong, K. Chen, and B. Wang, "Negative index of reflection in planar metamaterial composed of single split-ring resonators," *Applied Computational Electromagnetics Society (ACES) Journal*, vol. 26, no. 3, pp. 250-258, March 2011.
- [10] W. Abdouni, A-C. Tarot, and A. Sharaiha, "Realization of a compact patch antenna over an artificial magneto-dielectric substrate," *24th Annual Review of Progress in Applied Computational Electromagnetics (ACES)*, pp. 149-152, Niagara Falls, Canada 2008.
- [11] C. Fazi, S. Shi, I. Mirza, and D. Prather, "Split ring resonator slab modeling for a metamaterial loaded loop antenna," *23rd Annual Review of Progress in Applied Computational Electromagnetics (ACES)*, pp. 117-122, Verona, Italy, March, 2007.
- [12] Z. Szabo, G. Park, R. Hedge, and E.-P. Li, "A unique extraction of metamaterial parameters based on kramers-kronig relationship," *IEEE Trans. Microwave Theory Tech.*, vol. 58, pp. 2646-2653, 2010.

- [13] Y. Lo, "Theory and experiment on microstrip antennas," *IEEE Trans. Antennas Propag.*, vol. 27 pp. 137-145, 1979.
- [14] R. Hwang and S. Peng, "Surface-wave suppression of resonance-type periodic structures," *IEEE Trans. Antennas Propag.*, vol. 51, pp.1221-1229, 2003.
- [15] S. Yeap and Z. Chen, "Microstrip patch antennas with enhanced gain by partial substrate removal," *IEEE Trans. Antennas Propag.*, vol. 58, pp. 2811-2816, 2010.
- [16] J. Colburn and Y. Rahmat-Samii, "Patch antennas on externally perforated high dielectric permittivity material," *Electron Lett.* vol. 31, pp. 1710-1712, 1995.
- [17] H. Mosallaei and K. Sarabandi, "Antenna miniaturization and bandwidth enhancement using a reactive impedance substrate," *IEEE Trans. Antennas Propag.*, vol. 52, no. 52, pp. 2403-2414, 2004.
- [18] P. Ikonen, S. Maslovski, and S. Tretyakov, "PIFA loaded with artificial magnetic material: Practical example for two utilization strategies," *Microwave Opt. Technol. Lett.*, vol. 46, no. 46, pp.554-556, 2005.
- [19] P. Ikonen, S. Maslovski, C. Simovski, and S. Tretyakov, "On artificial magneto dielectric loading for improving the impedance bandwidth properties of microstrip antennas," *IEEE Trans. Antennas Propag.*, vol. 54, pp. 1654-1662, 2006.
- [20] A. Nicolson and G. Ross, "Measurement of the intrinsic properties of materials by time domain techniques," *IEEE Trans. on Instrum. and Measur.*, vol. 19, pp. 377-382, 1970
- [21] W. Weir, "Automatic measurement of complex dielectric constant and permeability at microwave frequencies," *Proceedings of the IEEE*, vol. 62, no. 62, pp. 33-36, 1974.



Esra Doğan received the B.S degree in Electrical – Electronics Engineering from Mustafa Kemal University in 2010 and M.S degree from Mustafa Kemal University, Hatay in Electrical Electronics Engineering in 2012. She has worked as lecturer in Mustafa Kemal University. Her current research interests are left hand metamaterial, metamaterial antenna design, metamaterial antenna applications, antenna design and testing, antenna arrays and numerical methods.




Muharrem Karaaslan received the PhD degree in Physics Department from University ofÇukurova, Adana, Turkey, in 2009. He is the coauthor of about 20 scientific contributions published in international journals and peer-reviewed conference proceedings. His research interest includes the applications of metamaterials in the analysis and synthesis of antennas, waveguides and textile.



Emin Ünal received the PhD degree in Electrical and Electronics Engineering from University of Gaziantep, Turkey, in 1994. He is the coauthor of about 20 scientific contributions published in international journals and peer-reviewed conference proceedings. His research interest includes Frequency selective surfaces and metamaterials.



Dilek Kapusuz received the associate degree in Industrial Electronics Department from 9 Eylül University, İzmir, Turkey, in 2001, and B.S degree as an Electronics Teacher in Electronics and Computer Education Department from Kocaeli University Technical Education Faculty, Kocaeli, Turkey, in 2007. She has carried out some studies on SRR Structures and Metamaterials as to present her Certificate of Completion Project between the years of 2005-2006. Also a conference paper of her on Multi-strip monopole antenna for UWB applications has been approved and published in IEEE Signal Processing and Communications Applications Conference that took place, Mugla, Turkey, in April in 2012.



Cumali Sabah received the B.Sc., M.Sc., and Ph.D. degrees in electrical and electronics engineering from the University of Gaziantep, Turkey. He is currently with Middle East Technical University - Northern Cyprus Campus. His research interests include the microwave and electromagnetic investigation of unconventional materials and structures, wave propagation, scattering, complex media, metamaterials and their applications.